

PRODUCT DATASHEET

DULUX T/E 42 W/840 GX24Q

OSRAM DULUX® T/E PLUS | CFLni, 3 tubes, with 4-pin base for ECG operation

Areas of application

- Offices, public buildings
- Shops
- Supermarkets and department stores
- Hotels, restaurants
- Industrial lighting

Product benefits

- Improved maintenance

Product features

- Good color rendering index
- Dimmable (3...100 %)
- Short and compact pin-base lamp with triple-turn tubes
- Single-ended four-pin plug-in GX24q base with shortened base casing



TECHNICAL DATA


Electrical data

| | |
|----------------------|---------|
| Nominal wattage | 42 W |
| Construction wattage | 43.00 W |
| Nominal voltage | 135 V |
| Nominal current | 320 mA |

Photometrical data

| | |
|---------------------------|------------|
| Luminous flux | 3200 lm |
| Light color (designation) | Cool White |
| Color temperature | 4000 K |
| Color rendering index Ra | ≥80 |
| Light color | 840 |

Dimensions & Weight

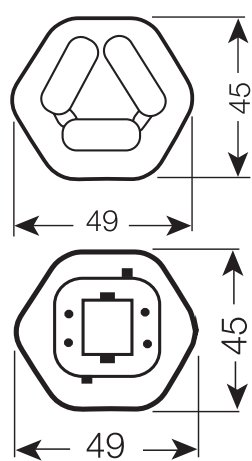

| | |
|----------------|-----------|
| Overall length | 167.00 mm |
| Diameter | 12.00 mm |
| Product weight | 70.00 g |

Additional product data

| | |
|-----------------------------|---------|
| Base (standard designation) | GX24q-4 |
| Mercury content | 1.7 mg |

Country-specific categorizations

| | |
|-----------------|-----------------|
| Order reference | DULUX T/E 42W/8 |
|-----------------|-----------------|

Energy labelling regulation data acc EU 2019/2015

| | |
|---|-----------|
| Light source cap-type (or other electric interface) | GX24q-4 |
| Length | 169.00 mm |
| Height | 12.00 mm |
| Width | 12.00 mm |

EQUIPMENT / ACCESSORIES

- Suitable for operation on electronic control gear

Safety advice

- In case of lamp breakage: www.ledvance.com/brokenlamp

DOWNLOAD DATA

LOGISTICAL DATA

| Product code | Packaging unit (Pieces/Unit) | Dimensions (length x width x height) | Gross weight | Volume |
|---------------|------------------------------|--------------------------------------|--------------|-----------------------|
| 4050300815886 | Folding box 1 | 45 mm x 48 mm x 173 mm | 93.00 g | 0.37 dm ³ |
| 4050300815893 | Shipping box 50 | 504 mm x 239 mm x 188 mm | 5084.00 g | 22.65 dm ³ |

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.