

PRODUCT DATASHEET

DULUX T/E 42 W/830 GX24Q

OSRAM DULUX® T/E PLUS | CFLni, 3 tubes, with 4-pin base for ECG operation

Areas of application

- Offices, public buildings
- Shops
- Supermarkets and department stores
- Hotels, restaurants
- Industrial lighting

Product benefits

- Improved maintenance

Product features

- Good color rendering index
- Dimmable (3...100 %)
- Short and compact pin-base lamp with triple-turn tubes
- Single-ended four-pin plug-in GX24q base with shortened base casing



TECHNICAL DATA


Electrical data

Nominal wattage	42 W
Construction wattage	43.00 W
Nominal voltage	135 V
Nominal current	320 mA

Photometrical data

Luminous flux	3200 lm
Light color (designation)	Warm White
Color temperature	3000 K
Color rendering index Ra	≥80
Light color	830

Dimensions & Weight

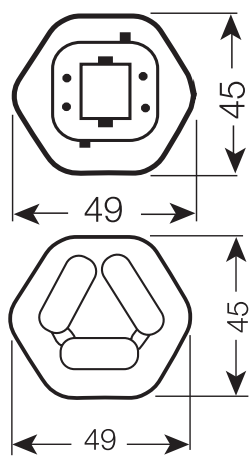

Overall length	167.00 mm
Diameter	12.00 mm
Product weight	70.00 g

Additional product data

Base (standard designation)	GX24q-4
Mercury content	1.7 mg

Country-specific categorizations

Order reference	DULUX T/E 42W/8
-----------------	-----------------

Energy labelling regulation data acc EU 2019/2015

Light source cap-type (or other electric interface)	GX24q-4
Length	169.00 mm
Height	12.00 mm
Width	12.00 mm

EQUIPMENT / ACCESSORIES

- Suitable for operation on electronic control gear

Safety advice

- In case of lamp breakage: www.ledvance.com/brokenlamp

DOWNLOAD DATA

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4050300815862	Folding box 1	45 mm x 48 mm x 173 mm	93.00 g	0.37 dm ³
4050300815879	Shipping box 50	504 mm x 239 mm x 188 mm	5084.00 g	22.65 dm ³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.